


## PUTRONS SJ-E® - Magnetic Strong Self-priming Centrifugal Pump 浦川磁力强自吸离心泵

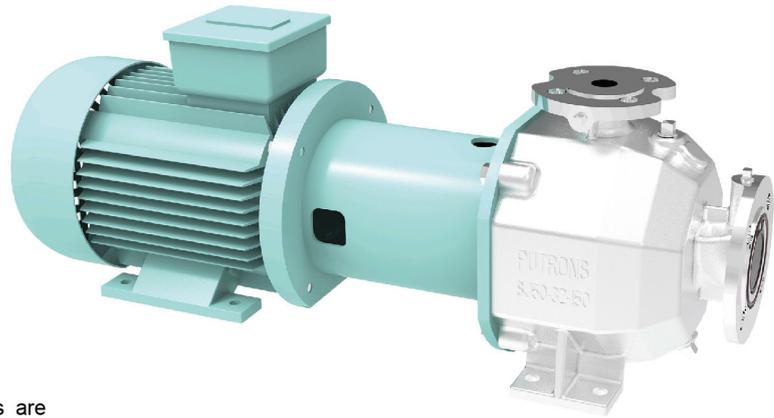

- Developed specially for low-carbon clean methanol fuel
- Invention patented product, many technical indicators are world-leading
- Better cavitation performance without inducer - NPSHr as low as 0.5 meter
- Self-priming height up to 9.5 meters
- Lower methanol suction liquid level, cleaner extraction
- The reduction range of the head curve is adjustable as the flow rate increases, suitable for multi-condition use in the marine industry
- Radial force balance design, longer life
- Fully cast pump body, less deformation
- Self-priming ability and pump efficiency will not decrease rapidly against impeller trimming
- Easy installation, easy maintenance, lower maintenance cost
- Higher efficiency and higher reliability
- Simple & compact, flexible and diverse configuration

- 专为低碳清洁甲醇燃料开发
- 发明专利产品, 多项技术指标全球领先
- 无需诱导轮即可实现更佳汽蚀性能 - NPSHr低至0.5米
- 自吸高度可达9.5米
- 更低的甲醇抽吸液面, 抽吸更干净
- 扬程曲线随着流量增加的降低幅度可调, 特别适用于船用行业的多工况使用
- 径向力平衡设计, 更长的寿命
- 全铸造泵体, 抗变形能力更强
- 自吸能力和泵效率不会随着叶轮切割而快速降低
- 安装简便, 易维护, 更低维护成本
- 高效率 高可靠性
- 简洁、紧凑, 配置灵活多样

50 Hz	60 Hz
Head range: 8 - 50 m 26 - 165 feet	Head range: 11.5 - 72 m 38 - 236 feet
Flow rate range: > 0.5 m <sup>3</sup> /h > 2.2 US gpm	Flow rate range: > 0.6 m <sup>3</sup> /h > 2.6 US gpm
Medium temperature range: • -110 °C ~ 200 °C • -166 °F ~ 392 °F	

50 Hz	60 Hz
扬程范围: 8 - 50 m 26 - 165 feet	扬程范围: 11.5 - 72 m 38 - 236 feet
流量范围: > 0.5 m <sup>3</sup> /h > 2.2 US gpm	流量范围: > 0.6 m <sup>3</sup> /h > 2.6 US gpm
介质温度范围: • -110 °C ~ 200 °C; • -166 °F ~ 392 °F;	