


PUTRONS SP-E- Magnetic Multi-stage Self-priming Centrifugal Pump 浦川磁力自吸多级离心泵

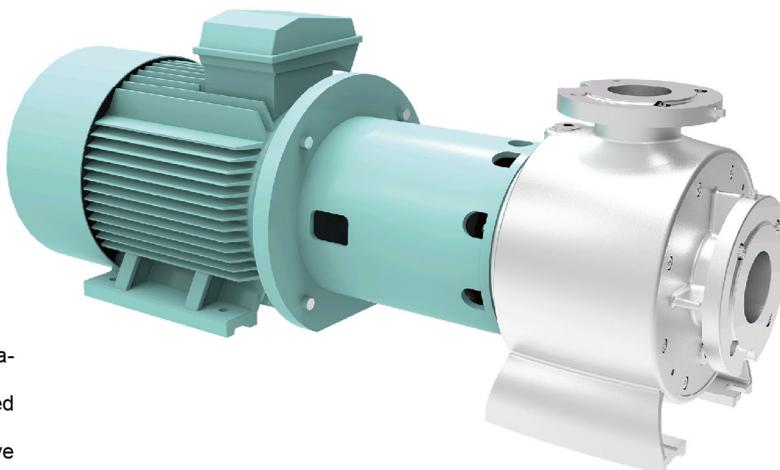

- PUTRONS's modularly designed SP pump is a new generation product that integrates a variety of self-priming. Based on many years of experience in self-priming pumps, we provide a series of structures to meet future demand for economical, highly self-priming and reliable pumps
- The unique design, compact and clear cylindrical shape, plus practical advantages such as easy assembly, maintenance and modular structure of all components, ensure long-term trouble-free operation
- Liquid ring or jet device is optional when quick priming or strong priming is required; the priming capacity will not degraded by impeller trimming
- Self-priming height up to 6 meters
- Fully cast circular symmetrical pump body has stronger deformation resistance
- Higher efficiency and higher reliability
- Simple & compact, flexible and diverse configuration

- 浦川模块化设计的SP泵是集成了多种自吸技术,并将性能最优化的全新一代产品。根据多年生产自吸泵的经验,我们提供系列化的结构以满足未来对经济、高自吸和可靠的泵需求
- 独特的设计,紧凑的轮廓清晰的圆柱形,加上易于组装、维护和所有组件的模块化结构等实用优势,确保长期无故障运行
- 可配置液环叶轮或喷射结构,提高自吸能力,并且不因叶轮切割而降低
- 自吸高度可达6米
- 全铸造圆形对称泵体,抗变形能力更强
- 高效率,高可靠性
- 简洁、紧凑、小巧,配置灵活多样

50 Hz	60 Hz
Head range: 1 - 100 m 3 - 330 feet	Head range: 2 - 150 m 6 - 490 feet
Flow rate range: 1 - 350 m ³ /h 5 - 1500 US gpm	Flow rate range: 2 - 400 m ³ /h 10 - 1760 US gpm
Medium temperature range: • -110 °C ~ 200 °C • -166 °F ~ 392 °F	

50 Hz	60 Hz
扬程范围: 1 - 100 m 3 - 330 feet	扬程范围: 2 - 150 m 6 - 490 feet
流量范围: 1 - 350 m ³ /h 5 - 1500 US gpm	流量范围: 2 - 400 m ³ /h 10 - 1760 US gpm
介质温度范围: • -110 °C ~ 200 °C; • -166 °F ~ 392 °F;	